





Available in **4095** or **2089**

The ExMesh™ Fastrack system was developed in conjunction with the rail industry as a secure alternative to palisade or chain link fencing systems, and its robust construction means that it has a very long field life. Its unique design makes it quick and easy to install, even on undulating ground.

• KEY FEATURES

- Versatile design for use in a variety of applications
- Simple to install and maintenance-free
- Deters trespass and route crime
- Suitable for sloping ground without stepping

Mesh Measurements

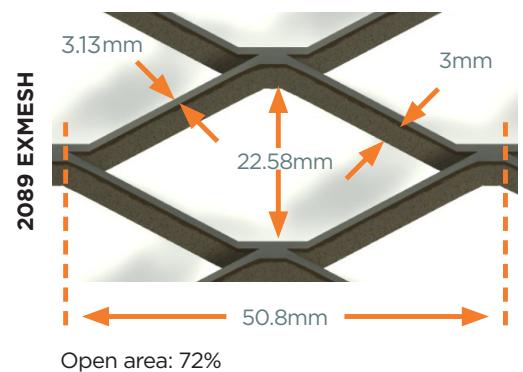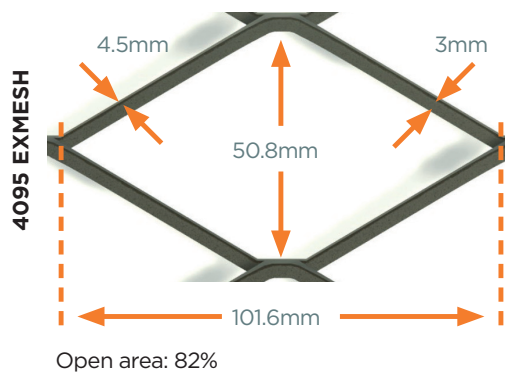

PANELS

Panel sizes (H x W)	1830 x 3000mm	2440 x 3000mm
Ground clearance	25mm	25mm
Overlapping	50mm	50mm
Coatings	Hot dipped galvanised to BS EN 1461 as standard Polyester power coatings are available in the RAL colour specification range and is guaranteed in accordance with INTERPON D25/D525	

FIXINGS



Type of posts	RHS 60 x 40 x 3mm	RHS 80 x 40 x 3mm
Type of fixings	Carriage bolts and shear nuts	Carriage bolts and shear nuts
Post centres	3m max	3m max
Clamp strip	1 off 40 x 5mm	1 off 40 x 5mm
How deep should posts be buried?	750mm	750mm
Foundation sizes (concrete) L x W x D	250 x 250 x 850mm	300 x 250 x 850mm
Baseplate sizes L x W x D	200 x 200 x 10mm	250 x 250 x 10mm

OTHER

Conformity	SBD (Secured by Design) 2089 only
-------------------	-----------------------------------

Disclaimer: All finished product specifications and particulars including weights and dimensions stated are approximate only and should only be used for guidance. The Expanded Metal Company Ltd has the right to change the specifications at any time without notice.


FENCE INSTALLATION

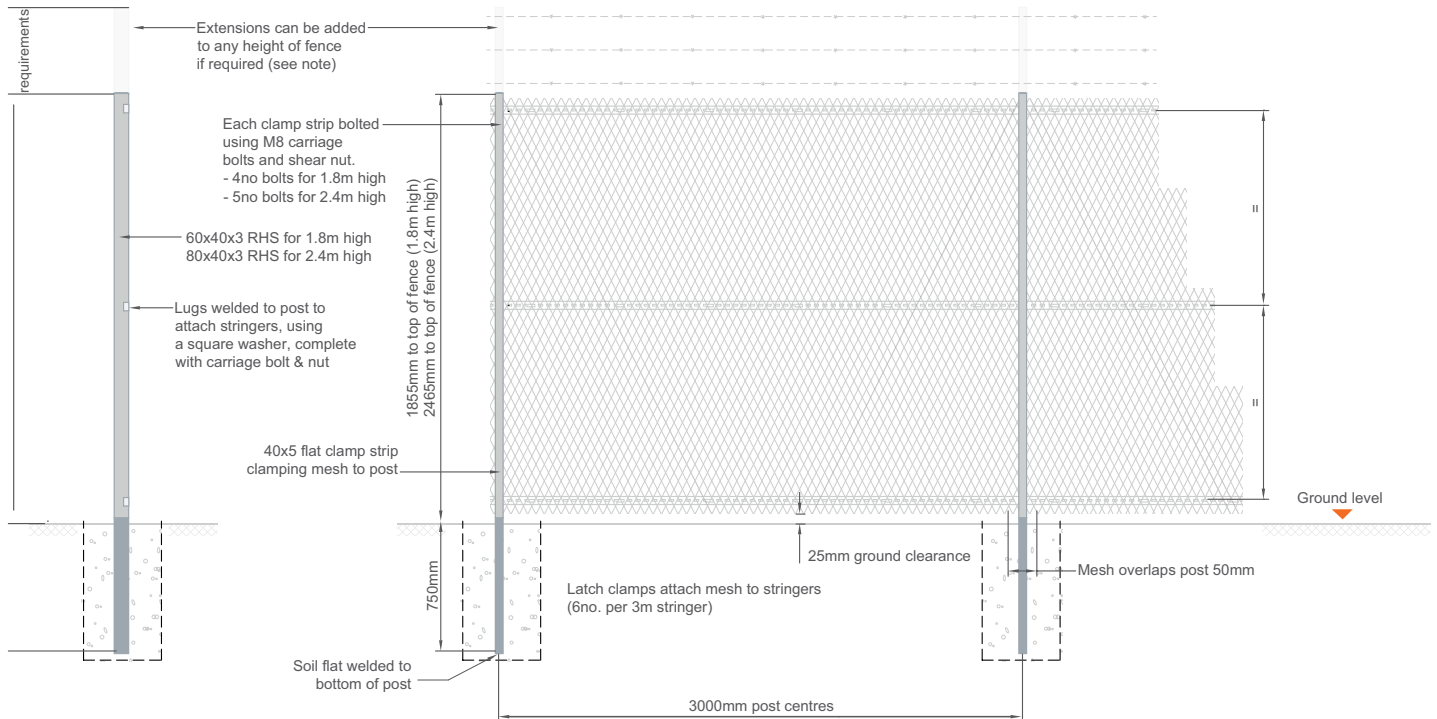

FIXINGS/POSTS

QUANTITY

1. 5mm clamp strip (1830/2440mm long)
4. M8 x 90 security bolts with snap off nuts (for 1.8 system)
5. M8 x 110 security bolts with snap off nuts (for 2.4 system)



STRINGER ASSEMBLY

QUANTITY

3. Stringers (2930mm long)
18. Latch clamps
18. M8 x 25 cup square bolt & nut